PCT

(51) International Patent Classification 6 : H04M 11/00	A1	(11) International Publication Number: WO 98/59487
		(43) International Publication Date: 30 December 1998 (30.12.98)

(21) International Application Number: PCT/US98/13136

(22) International Filing Date: 23 June 1998 (23.06.98)

(30) Priority Data:
60/050,528   23 June 1997 (23.06.97)   US
09/102,535   22 June 1998 (22.06.98)   US

(71) Applicant: ENACT HEALTH MANAGEMENT SYSTEMS [US/US]; Suite 306, 1975 El Camino Real West, Mountain View, CA 94040-2218 (US).

(72) Inventor: TACKLIND, Christopher, A.; 250 Cowper Street, Palo Alto, CA 94301 (US).

(74) Agents: GRAY, Gerald, T. et al.; Townsend and Townsend and Crew LLP, 8th floor, Two Embarcadero Center, San Francisco, CA 94111-3834 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: IMPROVED SYSTEM FOR DOWNLOADING AND REPORTING MEDICAL INFORMATION
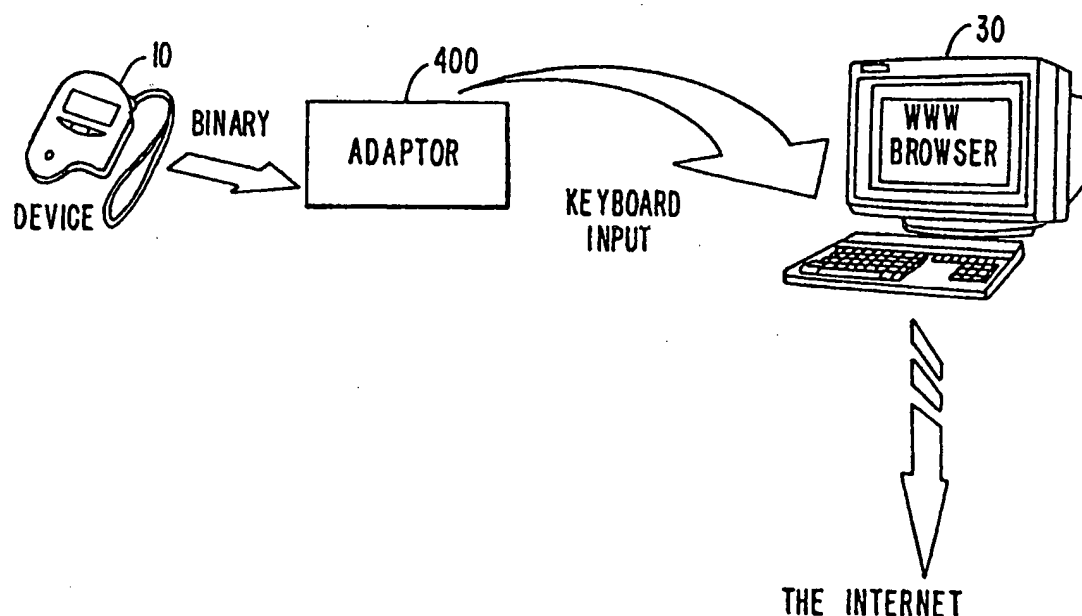
(57) Abstract

A system for transferring binary medical files from remote devices (10) to a central database over the internet includes an adapter (30) for converting the binary medical information file to a compatible file of keystroke codes. The keystroke codes are transferred to a computer (30) which converts the codes to ASCII characters which are input by an applet, and transferred to the central database. Software at the central database recovers the original binary medical information file. Additionally, a system for accessing medical reports in real time utilizes a report requesting data. The codes and data are transferred over the internet to a host computer which generates a report file, and transfers the file via internet to the requestor to be displayed on a computer.

IMPROVED SYSTEM FOR DOWNLOADING AND REPORTING
MEDICAL INFORMATION

BACKGROUND OF THE INVENTION

Medical Monitoring Devices

Various medical monitoring devices exist that download medical measurement data from a remote location to a central location. Such systems require a specialized interface to connect the device to a communication system such as the public telephone system or a pager information system.

For example, the AIRWATCH respiratory function monitor, described in U.S. Patent Application No. 5,549,117 ("the '117 patent") filed May 23, 1994 and assigned to the assignee of the present application, is a hand-held respiratory monitor that stores a binary file including information relating to respiratory parameters. When the AIRWATCH is connected to a telephone line a connection is automatically established to a central database and the encoded file is modulated by a software modem into analog signals which are transferred to a modem at the central site. The central modem demodulates the signals and generates a file which is processed at the central location and used to update a database.

Other medical devices include interface software and hardware connections to a personal computer. The computer can then be used to communicate with the central database utilizing a modem.

Additionally, as more monitoring devices are utilized in a patient's home, various devices could be located in different rooms or locations. Accordingly, the problems of interfacing to the central database are compounded.

The remote connection of medical devices, such as the AIRWATCH, via the public telephone lines presents problems when such devices are to be used worldwide. The binary

2

medical information file may include information related to
glucose levels, blood pressure, etc. The public telephone
systems of various countries are not standardized so different
models would have to be built for different countries thereby
5   increasing the overall cost of manufacturing the devices.
Since low cost is critical to encourage widespread use of such
devices, the lack of telephone system compatibility is a
serious problem to the internationalization of the technology.
          Additionally, each device generally includes a front
10   end to communicate results of a measurement to the user of the
device, e.g., a patient or health care provider. Typically, a
front end includes LEDs, a alpha-numeric display, synthetic
voice output, etc. The device may be coupled to a personal
computer which would execute special software to operate as a
15   front end.

Report Distribution System
          A system for generating and distributing medical
reports from a central database is described in the
20   above-referenced patent application. Various formats
including graphs and tables are described. Typically, these
reports are delivered by fax, mail, or e-mail. However, none
of these delivery systems facilitate real-time access of
medical records by a requestor.

25

                    SUMMARY OF THE INVENTION
          In one aspect of the present invention, the world-
wide-web (WWW) is utilized to provide an enhanced interface to
a medical monitoring device. Information from the device is
30   communicated to a personal computer executing standard web
browser software. A common gateway interface (CGI) form or
applet, executed by the web browser software, receives the
communicated information and functions as the front end of the
device. Thus, a high-resolution personal computer display can
35   be utilized as the front end of an inexpensive medical device.
A result page generated by web server functions as the display
of the medical measurement device. Additionally, the web page
includes applets for controlling the device according to

3

standard input, e.g, via mouse or keyboard, which is processed by the result page.

According to another aspect of the invention, medical reporting devices in different locations can be connected utilizing a home health-care bus in the form of the "Universal Serial Bus" (USB).

According to another aspect of the invention, a serial ID code is transferred to a remote database server. The database server responds to the code by providing data associated with the code. User specific data accessed by the ID code is utilized to format the response for the particular user.

Other features and advantages of the invention will be apparent from the following detailed description and appended drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1A is a schematic diagram of a first preferred embodiment of the invention;

Fig. 1B is a block diagram of a personal computer;

Fig. 2 is a flow-chart depicting the steps for using a web browser as a front end of a medical measurement device;

Fig. 3 is a schematic diagram depicting a home health-care bus;

Fig. 4A is a schematic diagram of a medical measurement device that downloads data to a computer through an adapter;

Fig. 4B is a flow-chart depicting the steps of converting a medical information file into a format compatible with a standard input to a personal computer;

Fig. 5 is a diagram depicting a standard keyboard interface;

Fig. 6A is a schematic diagram of an adapter;

Figs. 6B and 6C are diagrams depicting a specific embodiment of an adapter;

Fig. 7 is a flow-chart depicting the steps of transferring a compatible medical information file over the internet;

4

Fig. 8 is a schematic diagram of a system for transferring medical reports over the internet; and

Fig. 9 is a flow-chart depicting the steps of transferring medical reports over the internet.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1A is a block diagram of a preferred embodiment of a virtual front end utilizing standard web-browser software. In Fig. 1A, a medical device 10 includes an infrared (IR) transmitter for transmitting medical measurement data, modulated onto an IR carrier, to the IR input of a personal computer 30. In the following the term personal computer will be utilized to refer to any device, such as WebTV or other web appliances, that can be used to access the internet. The transmitted medical measurement data is transmitted in the form of keyboard data (as described more fully below) before being modulated onto the IR carrier. The IR transmitter and IR keyboard interface are standard, well-known parts and are not part of the present invention. The IR keyboard interface directly serves a variety of input devices such as, for example, a keyboard, mouse, AIRWATCH, thermometer, range of motion sensors, barcode reader, scale, height measurement, blood pressure cuff, tympanic compliance, mag stripe writer, tag writer, printer, and printer for wrist bands.

Fig. 1B is a block diagram of a typical personal computer and connected peripheral devices. The CPU executes programs which may be provided from the hard-disk drive (HDD), floppy-disk drive (FDD), from the serial port, or from other sources. Typically, a computer is connected to the internet via a modem connected to the serial port.

The personal computer executes standard web-browser software, e.g., Netscape Navigator, America On Line, or MicroSoft Internet Explorer. The World Wide Web (WWW) is a network for connecting computers via the internet. Typically, a client computer executes a browser application that allows a user to access documents from any site on the WWW. Documents in hypertext mark-up language (HTML) include links to other

HTML documents, graphics and sound files, executable
applications, etc. In some cases an HTML document includes
executable code, or scripts, embedded within the document. In
other situations an applet, for example a Java applet, is
5   referenced within an HTML document and downloaded from a
server to execute on the client computer displaying the HTML
document with the browser application.

        Forms may be included in HTML pages. Data is
entered into a form through the keyboard and transmitted to a
10   server application utilizing the common gateway interface
(CGI). A program resides on the server that receives the
information from the form and returns appropriate data. The
types of information that can be exchanged includes text data
and binary files such as GIF images.

15   In one embodiment, depicted in the flow-chart of
Fig. 2, a front-end home page is displayed by the web-
browser. The URL of the front-end home page can be stored as
a bookmark or favorite place.

        The compatible medical data is accepted by a form
20   included in the front-end home page and transmitted to a
server application executing on a host computer 32 (Fig. 1A)
using the common gateway interface (CGI). The server
application generates a page displaying the test results and
transmits the test results page to the web-browser. The web-
25   browser then displays the results to the user.

        Alternatively, the compatible medical data can be
input to a Java applet executed by the browser software. The
Java applet formats a results image which is displayed by the
web-browser. In the interest of security, the I/O of a Java
30   applet is restricted. For example, Java applets cannot read
or write files on the client computer executing the applet.
Additionally, the browser application limits an applet's
network connectivity. An applet's network connectivity is
currently limited to its host machine. However, a Java applet
35   can input keyboard data entered through the keyboard of the
client machine.

        Regardless of whether the results page is generated
by the server or a Java applet, the results page can include a

hot link to the web page of a personal physician or other
health-care provider. By clicking on the link the results of
a medical measurement is transmitted over the internet to the
physician's computer 34 (Fig. 1A). A internet link between

5   the computers 30 and 34 of the patient and physician
facilitates real time-health care monitoring. For example,
after reviewing the results of a measurement the physician
might suggest retrying the measurement under the same or
different conditions.

10   Additionally, as depicted in Fig. 1A and described
more fully below, the compatible medical data can be
transmitted to the central database 36 (Fig. 1A) utilizing the
CGI or a Java applet. The compatible medical data is received
at the server 32 which decodes the compatible medical data and

15   transfers the decoded data to a central database 36 which
integrates the decoded data into the database 36.

           In Fig. 1A, a device utilizing an IR transmitter is
depicted. If the device were in a different room than the
user's computer then the device could not transmit data

20   because IR transmission is limited to line-of-sight.
Accordingly, if the device were heavy or immobile, such as a
scale, or if multiple devices were located throughout the home
an IR interface to the computer would not be practical.

           However, as depicted in Fig. 3, various medical

25   measurement devices throughout the home can be connected to a
home healthcare bus. In a preferred embodiment, information
from each device 10A and 10B is coupled to the home wiring
system 300 and is transmitted to a data center 302 via the
wiring system. The data is transmitted over the home wiring

30   system utilizing interfaces well-known in the art.
Alternatively, special wires, cable, IR repeaters, radio-
frequency, or fiber could be utilized to form the bus. The
data center 302 includes an interface, for example an IR
transmitter, for providing encoded keyboard data to the

35   personal computer.

           Alternatively, the medical devices, web appliance,
telephone, and other peripheral are connected to the
"Universal Serial Bus" (USB). The USB provides a standard to

7

merge desktop connections. USB compliant medical monitors 10A
and 10B have USB interface connectors, e.g., the type B
connector is identical in size to an RJ-11 socket. The
monitors are connected directly to any USB computer or web
5   appliance through a generic cord.

In the above-referenced '117 patent,
the medical measurement device may be interfaced to a
telephone line via a reporter device which formats measured
data and interfaces with the central database. In the USB
10   embodiment, the reporter may function in two modes.

In a first mode, the monitor downloads measurement
data and the reporter interfaces with the central database
through the USB bus. In the second interactive mode, the
reporter establishes a live connection between the monitor and
15   central server. This allows the reporter to be generic and
the server to interrogate the monitor directory. The reporter
does not need to know anything specific about the particular
connected monitor and the server can then be continuously
extended to talk to new devices without changing the reporter.

20   The device of Fig. 1A outputs medical information
data encoded as keyboard data which can be received by the
keyboard interface of the personal computer. Thus, the
medical device could generate medical measurement files in
format compatible with a keyboard or other PC input port.

25   Alternatively, medical information data in binary or any other
incompatible format could be output by the device to an
adapter. The adapter is designed to convert the data output
by the device to encoded keyboard data which can be received
by the keyboard interface of the computer. A system utilizing

30   an adapter will now be described. In the following the
adapter is a stand-alone device which is connected to the
output of the medical measurement device. Alternatively, the
adaptor could be integrated into the device.

Fig. 4A is a system level diagram of another
35   preferred embodiment of the invention. In Fig. 4A, a medical
monitoring device 10 outputs a binary medical information
file. As described below, this file may be in the form of

analog signals modulated on a carrier frequency or as a
digital signal output by a digital interface.

In addition to the binary medical information file,
each device outputs a unique serialized identification code.

The operation of the system will now be described
with reference to Fig. 4A and flow chart of Fig. 4B. The
binary file is transferred to an adapter 400 which receives
the binary file and converts the file into a compatible
medical file in a format that may be processed and decoded by
the standard keyboard interface of a personal computer 30. In
the compatible medical file each byte of the medical file is
replaced by a scan code comprising ASCII characters which are
written to a keyboard buffer as an compatible medical
information file. Thus, there is a correspondence between
words in the binary medical file and ASCII characters which
are stored in the keyboard buffer.

The patient's personal computer 30 is connected to
the World Wide Web on the Internet and executes a browser
application. An applet or CGI form, invoked by the browser
application, reads keystroke ASCII codes from the keyboard
buffer and transfers the ASCII codes to a server application.
The server application processes the received ASCII codes to
reconstruct the original binary medical file which is then
processed by software at the server to generate a result page
to be displayed by the PC 30 or to store the received medical
information in a database 36.

The result page generated by the server can be
formatted to function as an enhanced user interface. For
example, the AIRWATCH (described above) includes an LED
interface for displaying time, date, personal best data,etc.,
and includes buttons for controlling monitor functions. As
monitors get smaller and more complicated the process of
controlling each function of the device with small buttons and
a small display gets difficult.

However, if the monitor is connected to the web, via
the USB, for example, then the web server can generate a
result page for display on web appliance monitor that includes -

formatted display of the monitor output parameters and
software buttons for controlling the monitor function.

As an example, for the AIRWATCH, the personal best
and other data are displayed one at a time. The right and
5   left buttons move to the next digit to the right or left. In
an enhanced interface the entire line of parameters would be
displayed stretching across the result page. With the
standard mouse and keyboard interface any digit could be
selected directly and a pop out list used to select the
10 desired value.

Once a monitor is connected to the web, the ID code
is provided to the server and functions as a hardware key
allowing access to the data on the server associated with that
device.

15 The server responds to the ID by checking user-
specific data which describes attributes of the user such as
age and native language. The server formats a response page
in a manner appropriate to the particular user. Viewing
preferences can be saved and recalled during a subsequent
20 session.

Hardware key recognition can be utilized in
connection with conventional typed-in data, such as passwords.
If a logging monitor is used by more than one family member a
"user selector" indicates to the web application which family
25 member's data is to be displayed.

Similarly, when a connection is established from a
doctor's office, the database server recognizes the device and
the doctor (by his web login). In this way, the server
recognizes whether the connection to the database is
30 authorized, and information is displayed appropriately.

PC Keyboard Controller and ISR

The structure of the keyboard 500 and keyboard
interface 510 for a PC is depicted in Fig. 5. This
35 configuration is well-know and will be only briefly described.
When a key is pressed, a scan code in the form of ASCII codes
unique to the key is generated by the keyboard chip 502 and is
serially transferred to the keyboard interface 510 by the

10

keyboard cable 520. The serial data is converted to a
parallel byte so that the scan code can be processed by the
microprocessing unit (MPU).

          The scan codes are received by the PC and translated
5   to ASCII codes utilizing a Keyboard Interrupt Service Routine
     (ISR) included in the Basic I/O System (BIOS). The ISR is
     invoked by INT 09 each time a key is pressed and converts
     keyboard data into information that is useful to the system.
     This conversion results in the Keyboard ISR placing a two-byte
10   character code into a keystroke buffer in the PC's memory.

          Typically, the keyboard ISR in a PC/AT system
     converts the codes received into System Scan Codes. These
     System Scan Codes are then compatible into the two-byte
     character codes having a low-order byte, called the main byte,
15   and a high-order byte, called the auxiliary byte. The ASCII
     value of a key-stroke (if any) is always contained in the main
     byte and the scan code as the auxiliary byte. When a key,
     such as a function key, edit key, or function key combination,
     does not have an ASCII value, then the Keyboard ISR sets the
20   main byte to 00h and the auxiliary byte to a special key
     value.

          A BIOS Keyboard Device Service routine provides an
     interface through which the operating system or application
     software can interface with the keyboard buffer.
25

     The Adapter

          Fig. 6A is a block diagram of the adaptor 400 which
     includes a device interface 402, processor 410, and serial
     interface 420. If the medical device 10m utilizes a modem to
30   output a modulated carrier signal encoding the binary medical
     file then the device is connected to a modem interface in the
     device interface 402. If the medical device 10s has a serial
     output then it is connected to a serial interface in the
     device interface 402. A specific device interface 402 may
35   have either a modem, serial interface, or combination of the
     two.

          A processing unit 410 converts the words of the
     binary medical information file to scan codes and transfers

the scan codes to the keyboard serial interface 420. The
conversion of the words in the binary medical information to
scan codes is accomplished utilizing standard techniques,
e.g., a look-up-table.

5   The keyboard serial interface 420 transfers the scan
code serially to the keyboard controller on the PC as
described above. The keyboard serial interface 420 is a
pass-through connection that passes the output from the
connected keyboard to the PC when a medical device 10 is not
10   connected to the adapter.

        A specific embodiment of a prototype adapter 600 is
depicted in Figs. 6B and 6C. In Fig. 6B a device having an
output modulated by a modem is coupled to the adapter 600
through a standard RJ-11 jack. A telephone simulator couples
15   the binary medical file to an HP Palmtop computer through a
PCM-CIA modem 620. A wedge circuit controllably couples
either the keyboard or Palmtop output to the PC.

        The operation of the adaptor 600 will now be
described for the case where an AIRWATCH respiratory function
20   monitor is coupled to the adaptor. The data interface to the
AIRWATCH specifies a 5 byte serial number, a packet list
including a header, 128 bytes of packet data, and 2 bytes of
CRC (cyclic redundancy checking).

        The adapter 600 auto-answers AIRWATCH initiated
25   downloads and sends the AIRWATCH data over the IBM PC keyboard
port as if typed on a "virtual" keyboard. Each byte of the
AIRWATCH data is converted to 2 ASCII hex nibbles. Thus, for
example a byte having hex value 0x1A is represented as if the
two-character ASCII string "1A" was typed on the keyboard. In
30   this embodiment the adapter 600 does not perform any CRC or
error checking, it simply converts and passes along data that
it receives.

        As described above, the I/O options of Java applets
are limited by security considerations. One such limitation
35   is that the Java output cannot output data through the
keyboard interface. For medical devices requiring an
acknowledge signal or other handshaking, the adapter is not
able to provide the required information. Accordingly, the

12

server application can display an acknowledge which must be
provided to the device by the user.

Internet Transfer of Medical Records

5   Referring to Figs. 1 and 7, a process for
transferring medical information from a medical measuring
device to a central database 36 will now be described.
Referring to the flow-chart of Fig. 7, a browser application,
running on the user's computer, utilizes a designated URL to

10   access a data transfer page over the internet. As described
above, the designated URL may be automatically provided when a
medical device 10 is coupled to the adapter 20.
          The data transfer page includes an embedded data
transfer applet, which in a preferred embodiment is a Java

15   applet. The applet is executed on the user's computer and
inputs the converted medical file from the keyboard buffer and
transmits the file to the host computer 32.
          Alternatively, as described above, the data transfer
page can include a form that transmits converted medical data

20   to the host 32 utilizing the CGI.
          The host computer decodes the converted medical file
to change the ASCII codes to corresponding bytes of the
medical information file. Preferably, the medical information
file is in a form that is processed by database software to

25   update the medical database 36.

Internet Delivery System
          A system for utilizing the internet to deliver
medical reports in real-time will now be described with

30   reference to Figs. 8 and 9. Typically, the reports are
computer generated from records in a central database and are
formatted either as text or graphics files. Additionally, the
reports can be formatted as faxes, letters, etc. An example
of a central database is described in the '117 patent and

35   includes information downloaded over the telephone system from
AIRWATCH devices.

SUBSTITUTE SHEET (RULE 26)

A report requester utilizes a browser executing on a client computer 30 to access a report request page by supplying a designated URL.

The host computer 32 generates a report request HTML document including a FORM to allow feedback from a client computer 34 displaying the report request document using a browser application.

The report requester enters passwords for accessing a particular patient's records. The requestor also indicates the desired format of the report, e.g., a graph, table, or other format. When the requestor completes filling out the form the information entered is transferred to the form reporting server application executing on the host computer 32 utilizing the common gateway interface (CGI).

The form reporting server application invokes a report delivery script which first checks the codes to confirm that the requester is authorized to access the records. The script then invokes report generating software which generates a report file.

If the report file is a text file then the report delivery script converts the file to an HTML report file and transfers the report file to the client computer to be displayed by the browser application. If the report file is a graphics file it is converted by the report delivery script into a graphics file type that can be displayed by the browser or a browser helper application or plug-in and transfers the compatible graphics report file to the client computer to be displayed by the browser application.

In a preferred embodiment, the report files are Postscript® files which are converted by the server report delivery software to .GIF files before transfer to the client computer. Formats of reports are depicted in the above-referenced patent application.

Alternatively, an interactive requestor user interface can be implemented utilizing a Java applet.

Thus, physicians, health officials, and other medical personnel have real-time access to database records stored at a central location.

The invention has now been described with reference
to the preferred embodiments. Alternatives and substitutions
will now be apparent to persons of skill in the art. For
example, the keyboard interface of a PC has been described.
5   However, the principles of the invention are equally
applicable to other platforms including Macintosh® and UNIX.
Further, the preferred embodiment utilizes the WWW. Again,
other network implementations are within the scope of the
invention. Accordingly, it is not intended to limit the
10   invention except as provided by the appended claims.

WHAT IS CLAIMED IS:

1.   A system for implementing an enhanced interface for a medical measurement device, said system comprising:

        a web appliance, connected to a network and including standard I/O ports and a display device;

        a data input/output interface, coupling the medical measurement device and the web appliance, for transmitting compatible information data, from the medical measurement device, in a digital format compatible for processing by said web appliance and for transmitting medical measurement device control information from the web appliance to the medical measurement device; and

        a processor included in said web appliance, executing web-browser software to display a front-end page and configured to process said information data provided by said medical measurement device and to display a result page displaying parameter values relating to the operation of the medical device and for displaying interactive function keys to activate functions in the medical device.

2.   The system of claim 1, further comprising a remote database server coupled to the network, wherein said remote database server receives compatible medical data from said processor, generates said result page and transmits said result page to said processor.

3.   The system of claim 2, wherein said compatible medical data received by the remote database server includes a device identification data provided by said medical measurement device.

4.   The system of claim 3, wherein said device identification data is implemented as a hardware key in said medical measurement device.

1   5.   The system of claim 2, wherein said compatible
2   medical data received by the remote database server includes a
3   user identification data identifying a specific user.

1   6.   The system of claim 5, wherein said remote
2   database server generates said result page in accordance with
3   preferences associated with said user identification data.

1   7.   The system of claim 1, wherein said information
2   data provided to said processor by said medical measurement
3   device is input to a Java applet executed by said web-browser
4   software, wherein said Java applet formats said result page.

1   8.   The system of claim 1, wherein said digital
2   format is one of a binary data format and a keyboard data
3   format.

1   9.   A system for implementing a hardware key for a
2   medical measurement device to gain access to a remote
3   database, said system comprising:
4   a web appliance, connected to a network and
5   including standard I/O ports and a display device;
6   a data output interface, coupled to a medical
7   measurement device, for providing medical measurement device
8   identification data to said web appliance;
9   a remote database server coupled to the network,
10   said database server for providing user data when a
11   identification data associated with a user is received;
12   a processor included in said web appliance,
13   executing web-browser software to display a front-end page and
14   configured to transfer said medical identification data
15   provided by said medical measurement device to said remote
16   database server to gain access to data associated with a user
17   of said medical measurement device.

1   10.   A medical information management system for
2   receiving medical information measured by a plurality of

3   medical measurement devices and providing the information to a

4   personal computer, said system comprising:

5   a bus, having a plurality of input/output ports for

6   coupling to one of the medical devices;

7   a web appliance coupled to the bus, with the web

8   appliance executing web-browser software to display a

9   front-end page and configured to process information data

10   provided by said one medical measurement device and to display

11   a result page; and

12   a telephone connector for connecting said one

13   medical device to a remote database.

1   11.   The system of claim 10, wherein said bus is a

2   Universal Serial Bus.

1   12.   The system of claim 10, wherein said telephone

2   connector includes a reporter device which formats information

3   data from said one medical device and interfaces with said

4   remote database.

1   13.   The system of claim 12, wherein said reporter

2   device sends formatted information to the remote database, and

3   wherein the remote database generates said result page and

4   sends said result page to said web appliance.

1   14.   The system of claim 12, wherein the reporter

2   device interfaces with the remote database over said bus.

1   15.   The system of claim 10, wherein the telephone

2   connector includes a reporter device which establishes a

3   direct connection between said one medical device and said

4   remote database.

1   16.   The system of claim 10, wherein said web

2   appliance receives said result page from said remote database.

1   17.   The system of claim 10, wherein said web

2   appliance receives said information data provided by said one

3   medical device directly from said one medical device over said

4   bus.

1   18.   The system of claim 10, wherein said remote

2   database server receives information data from said medical

3   measurement device, generates said result page and transmits

4   said result page to said web appliance.

1   19.   The system of claim 18, wherein said

2   information data received by the remote database server

3   includes a device identification data provided by said medical

4   measurement device.

1   20.   The system of claim 19, wherein said device

2   identification data is implemented as a hardware key in said

3   medical measurement device.

1   21.   The system of claim 18, wherein said

2   information data received by the remote database server

3   includes a user identification data identifying a specific

4   user.

1   22.   The system of claim 21, wherein said remote

2   database server generates said result page in accordance with

3   preferences associated with said user identification data.

1   23.   A medical information management system for

2   receiving and processing medical information measured by one

3   or more medical measurement devices, the system comprising:

4   a web appliance executing web-browser software to

5   display a front-end page and configured to process information

6   data provided by the one or more medical measurement devices

7   and to display a result page;

8   communication means for communicably coupling said

9   one or more medical measurement devices to said web appliance;

10   and

11   a remote server coupled to said web appliance over a

12   network.

1   24.   The system of claim 23, wherein said
2   communication means includes a Universal Serial Bus.

1   25.   The system of claim 23, wherein said
2   communication means includes one of a wire cable, an IR
3   repeater, a radio-frequency interface and a fiber optic cable.

1   26.   The system of claim 23, wherein said web
2   appliance receives a medical information data from one of the
3   medical measurement devices and generates the result page.

1   27.   The system of claim 23, wherein said web
2   appliance receives a medical information data from one of the
3   medical measurement devices and wherein the web appliance
4   sends the medical information data to the remote server over
5   the network.

1   28.   The system of claim 27, wherein the remote
2   server sends the result page to the web appliance over the
3   network for display at the web appliance.

1   29.   A system for allowing authorized access to
2   medical information associated with a patient in a remote
3   database, the system comprising:
4   a medical measurement device associated with a
5   patient;
6   a remote database server coupled to a network, said
7   database server for providing user data associated with said
8   patient;
9   a data output interface, coupled to the medical
10 measurement device, for providing medical measurement data and
11 device identification data to said remote database; and
12   a web appliance, coupled to the network and
13 including standard I/O ports and a display, said web appliance
14 executing web-browser software to display said user data
15 wherein said web browser sends a login code to said remote
16 database, and wherein said remote database sends said user
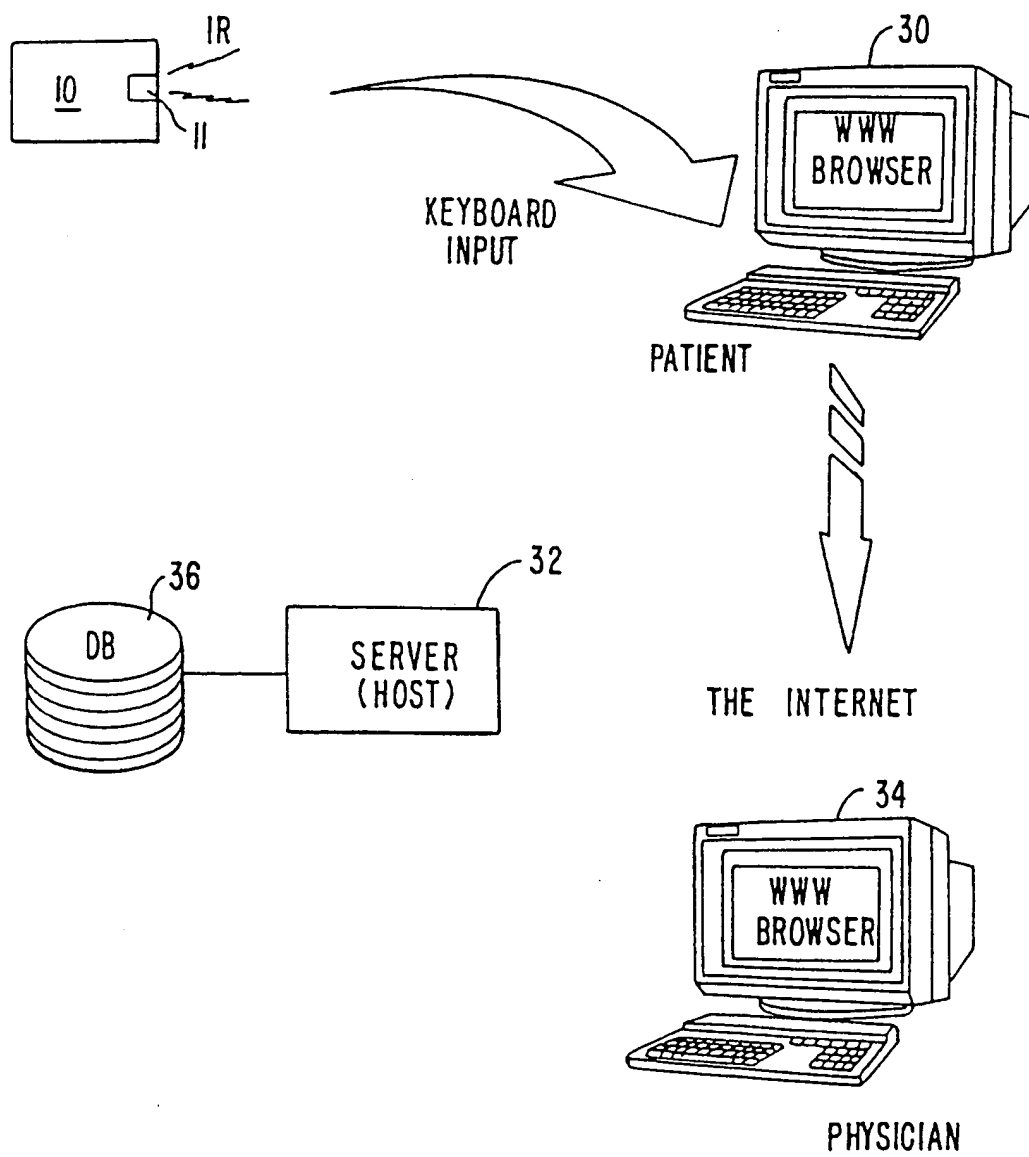
17   data to said web appliance if said login code is associated--
18   with said device identification data.

1   30.   The system of claim 29, wherein said user data
2   is transmitted to said web appliance as a front-end page, and
3   wherein said front-end page is displayed on the display.

1   31.   The system of claim 29, wherein said data
2   output interface includes a reporter device which establishes
3   a direct telephony connection between the medical measurement
4   device and the remote database.

1   32.   The system of claim 29, wherein said data
2   output interface includes a reporter device which downloads
3   said medical measurement data and said device identification
4   data, and wherein said reporter device interfaces directly
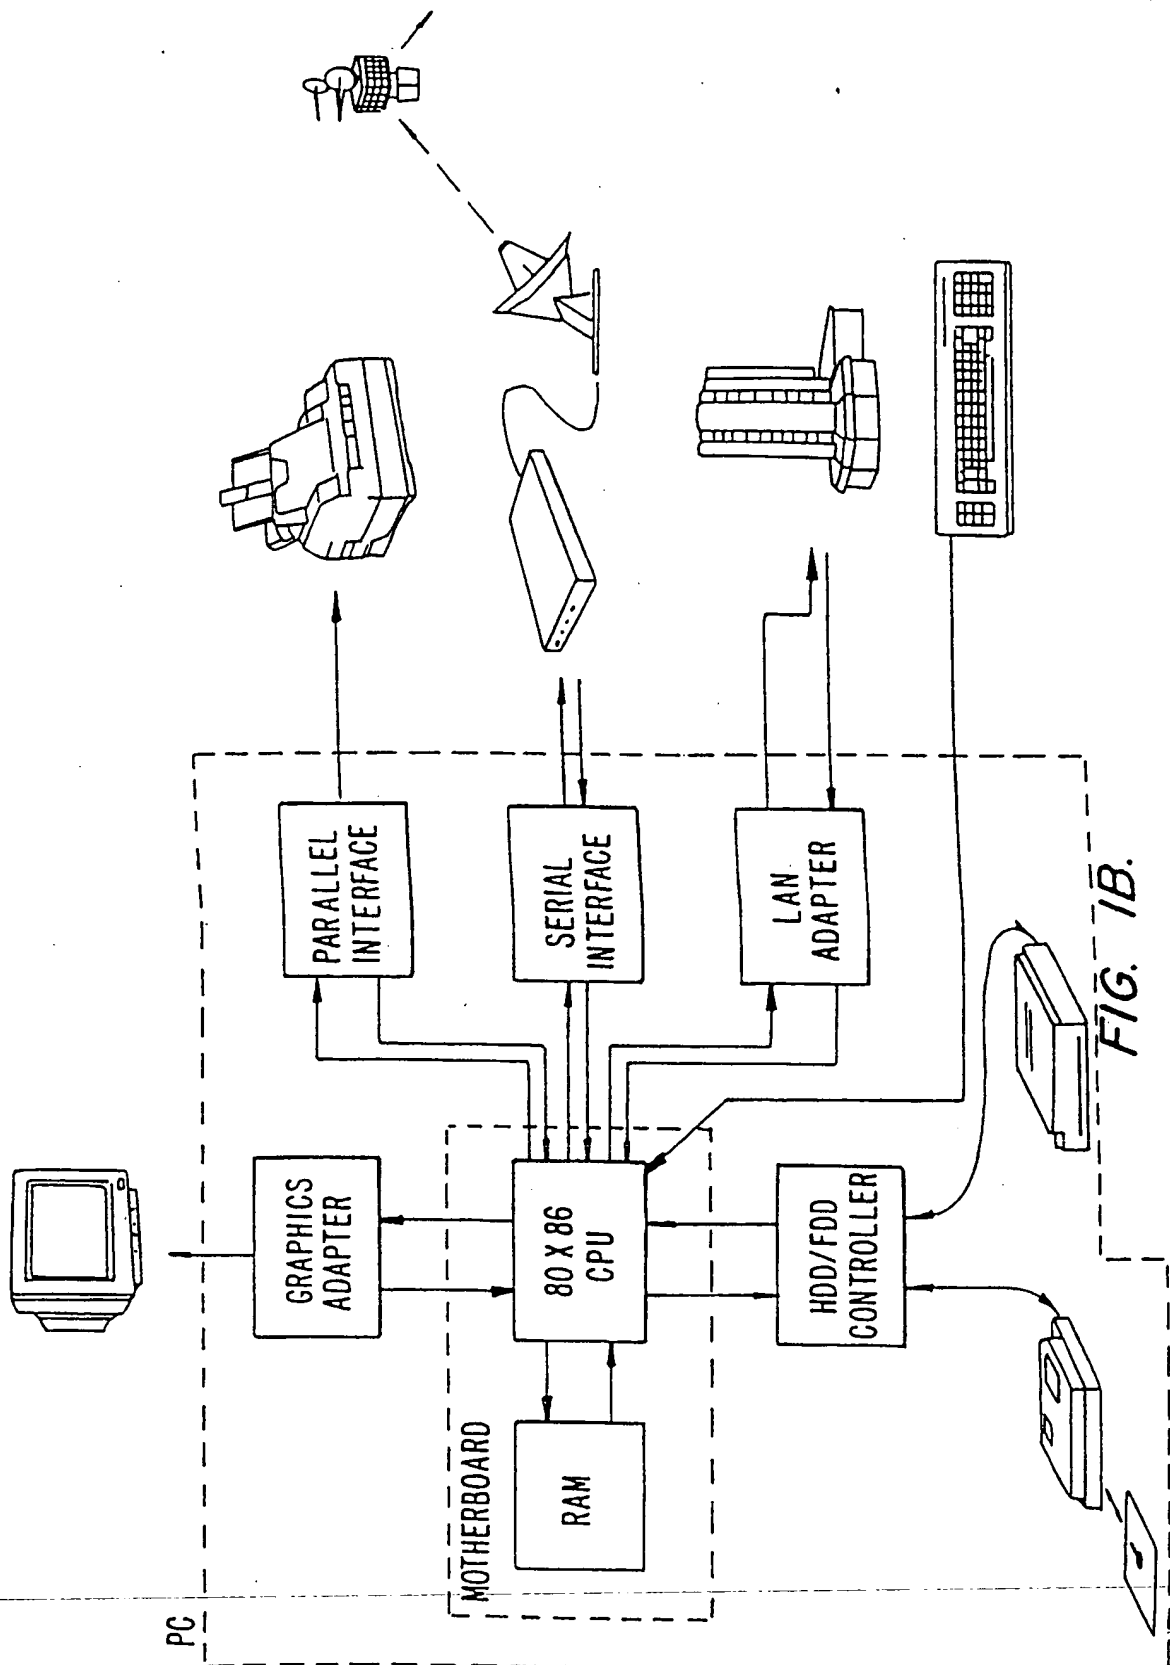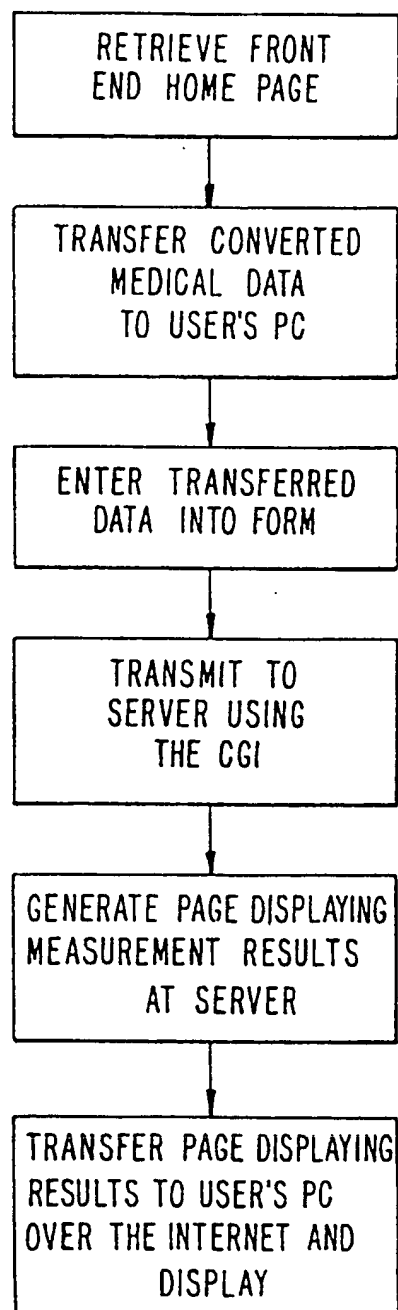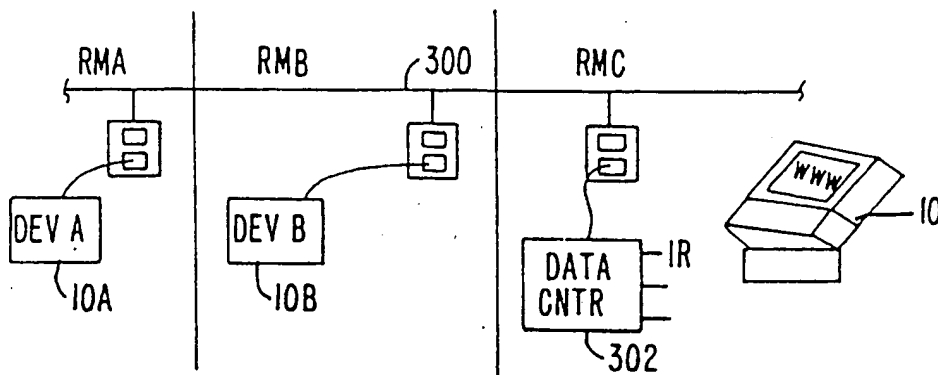5   with said remote database.

FIG. IA.

FIG. 1B.

```
┌─────────────────────┐
│   RETRIEVE FRONT    │
│   END HOME PAGE     │
└─────────────────────┘
           │
           ▼
┌─────────────────────┐
│  TRANSFER CONVERTED │
│    MEDICAL DATA     │
│    TO USER'S PC     │
└─────────────────────┘
           │
           ▼
┌─────────────────────┐
│  ENTER TRANSFERRED  │
│   DATA INTO FORM    │
└─────────────────────┘
           │
           ▼
┌─────────────────────┐
│     TRANSMIT TO     │
│   SERVER USING      │
│     THE CGI         │
└─────────────────────┘
           │
           ▼
┌─────────────────────┐
│ GENERATE PAGE DISPLAYING │
│ MEASUREMENT RESULTS │
│      AT SERVER      │
└─────────────────────┘
           │
           ▼
┌─────────────────────┐
│ TRANSFER PAGE DISPLAYING │
│ RESULTS TO USER'S PC │
│ OVER THE INTERNET AND │
│      DISPLAY        │
└─────────────────────┘
```

FIG. 2.

FIG. 3.
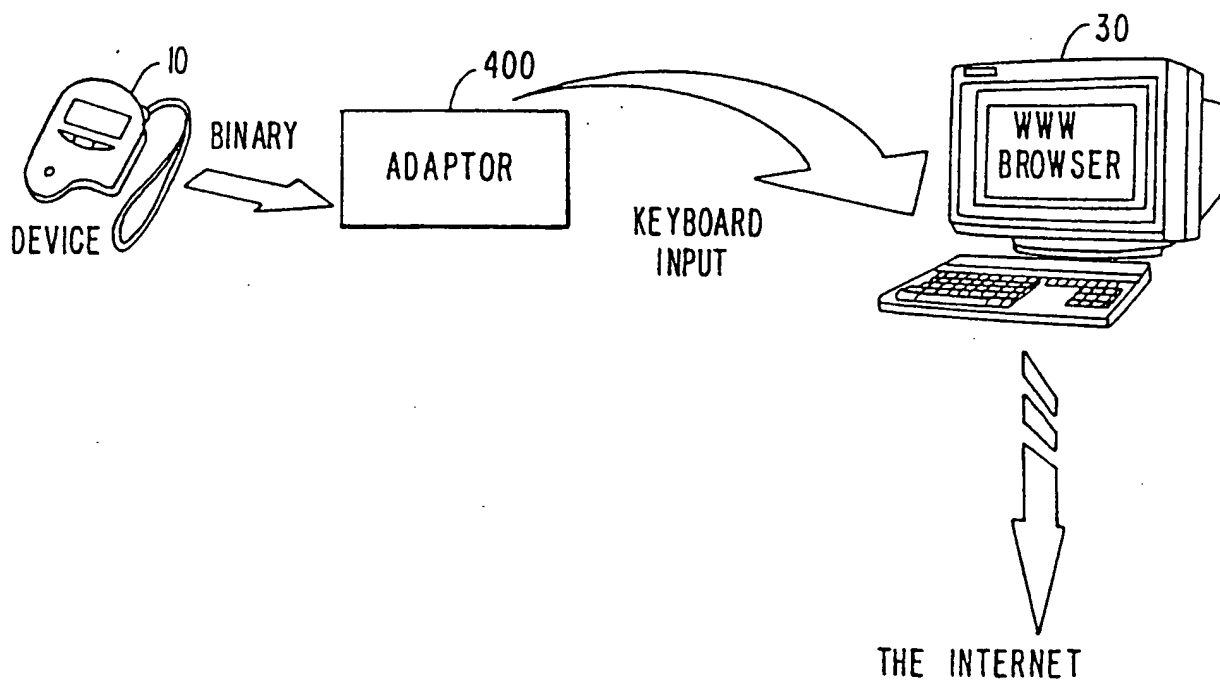
FIG. 4A.
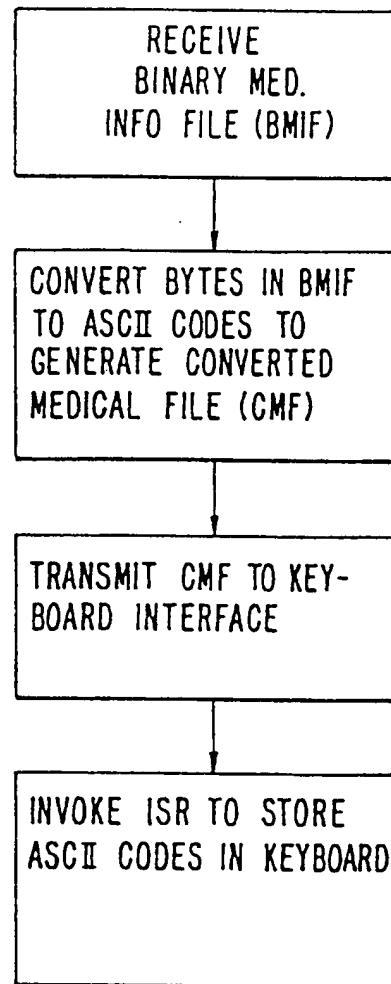
FIG. 4B.

6/11

FIG. 5. PRIOR ART

FIG. 6A.

FIG. 6B.

FIG. 6C.
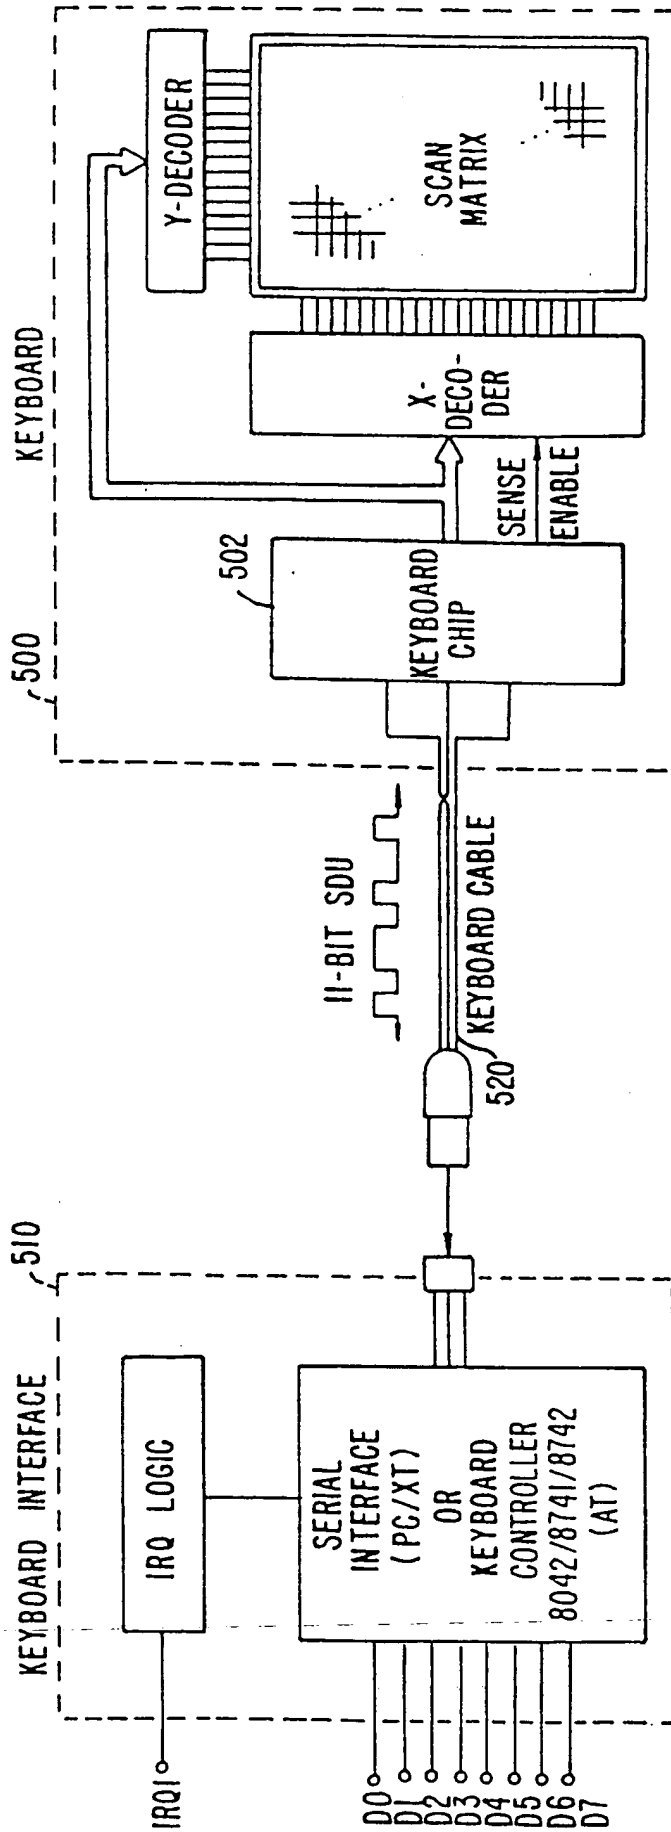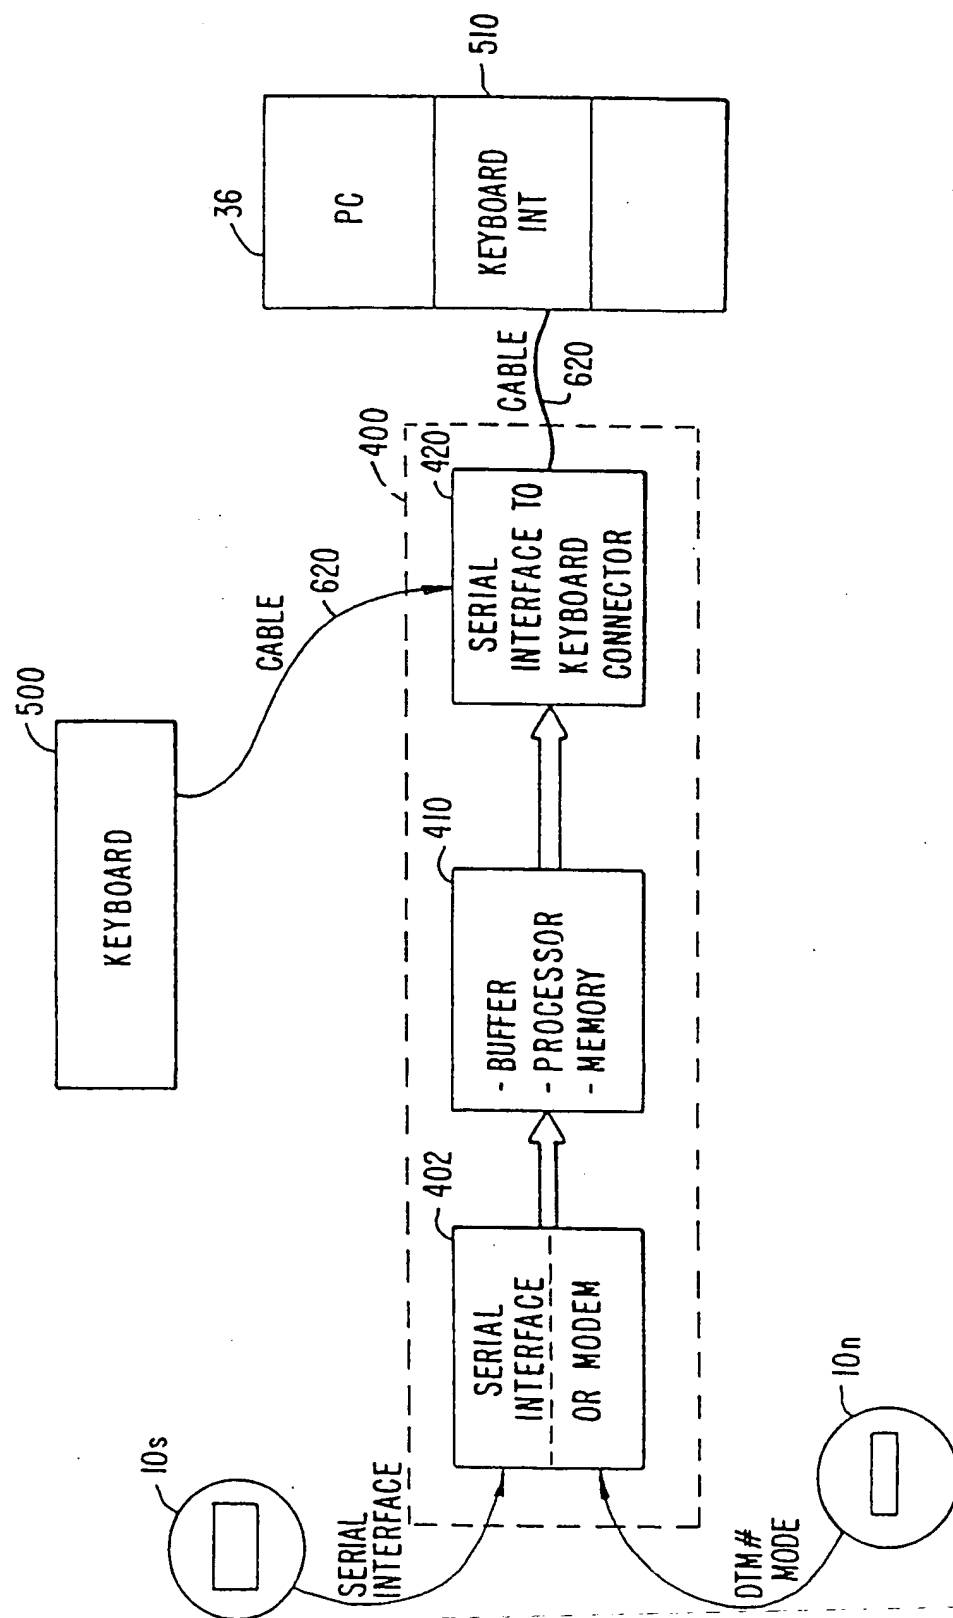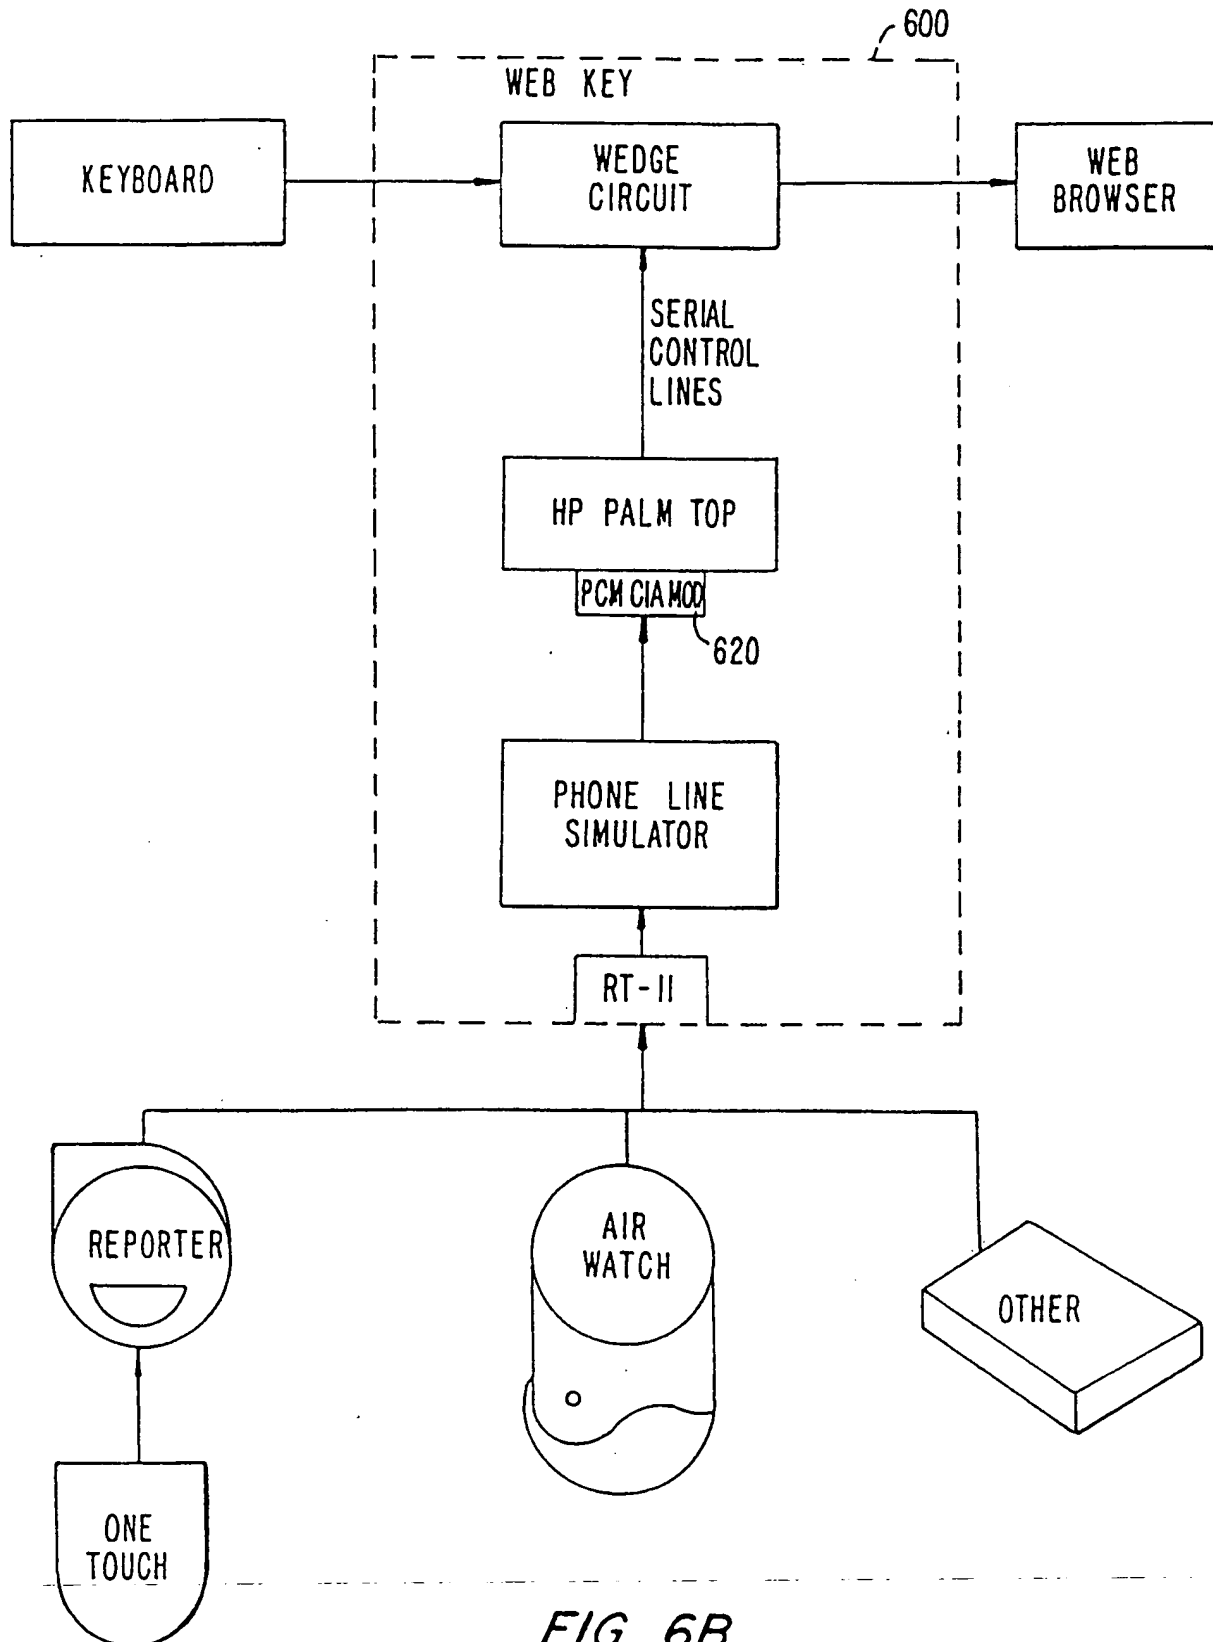
( ) INDICATES NULL MODEM PINOUT

BROWSER EXECUTED ON
USER'S PC

CONNECTER CALLS UP
DESIGNATED URL TO DOWN-
LOAD HOME PAGE WITH
EMBEDDED FILE TRANSFER
APPLET

FILE TRANSFER APPLET OR
GGI FORM ACCESSES KEY-
BOARD AND TRANSFERS
ENCODED CMF TO HOST VIA
HTTP

HOST DECODES ENCODED
CMF TO RECOVER BMF
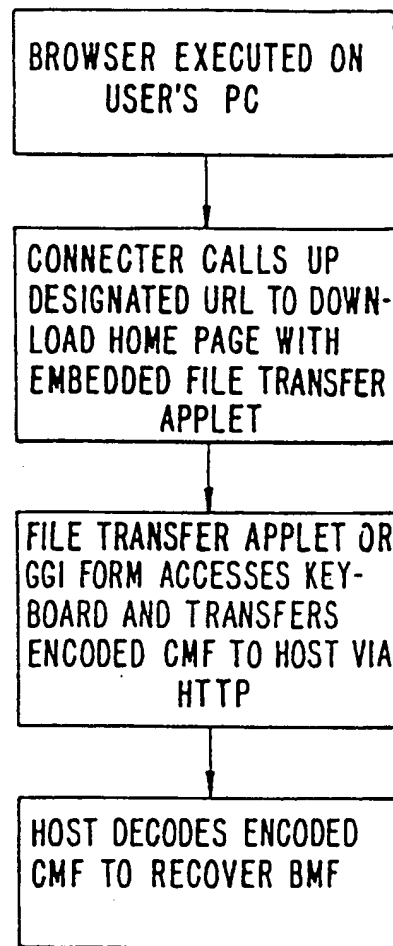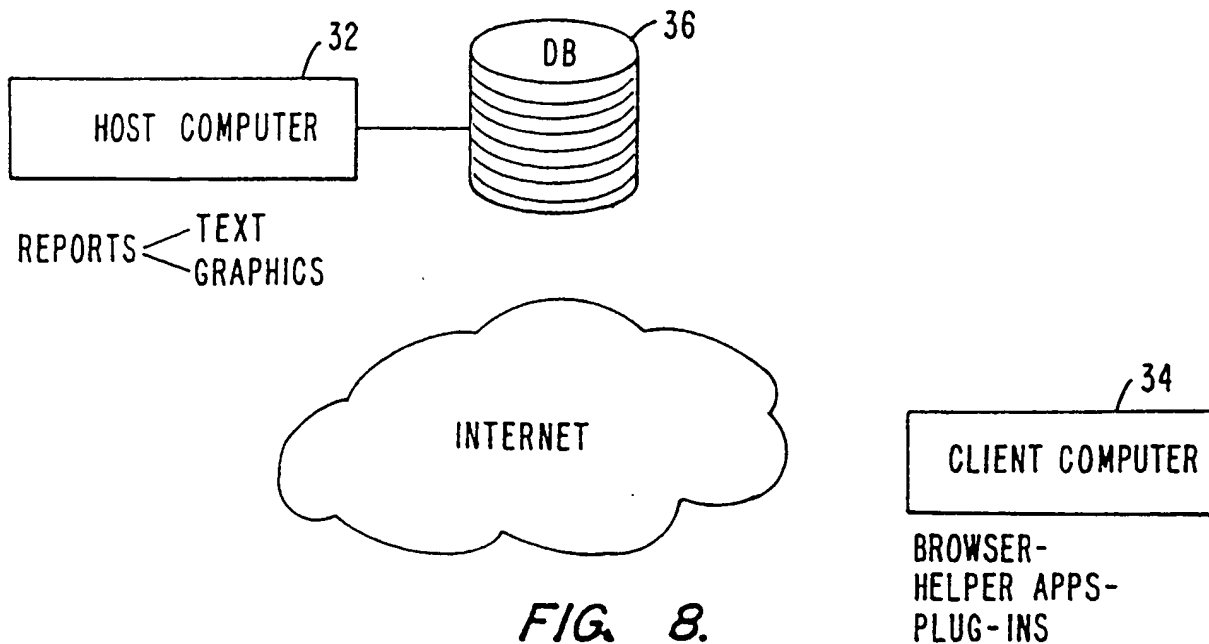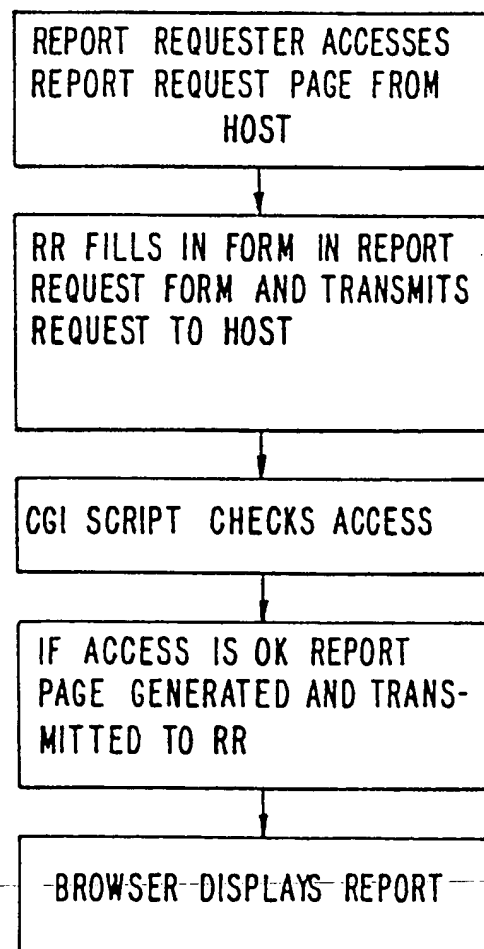
FIG. 7.

FIG. 8.

FIG. 9.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US98/13136

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :H04M 11/00

US CL :379/38, 600/300, 908

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 379/38, 600/300, 908

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,633,910 A (COHEN) 27 May 1997, entire document.	1-3, 5-19, 21-32

☐ Further documents are listed in the continuation of Box C.   ☐ See patent family annex.

•	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be of particular relevance		
"E"	earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
27 AUGUST 1998	23 SEP 1998
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	Authorized officer STEPHEN HUANG
Facsimile No. (703) 305-3230	Telephone No. (703) 308-3399

Form PCT/ISA/210 (second sheet)(July 1992)★